


| A-A' | FAÇADE BASE      | H-H' | INSIDE CORNER (OPEN JOINT)       |
|------|------------------|------|----------------------------------|
| B-B' | PARAPET CAP      | I-I' | OUTSIDE CORNER (OPEN JOINT)      |
| C-C' | HORIZONTAL JOINT | J-J' | DOOR HEAD                        |
| D-D' | VERTICAL JOINT   | K-K' | DOOR JAMB                        |
| E-E' | WINDOW SILL      | L-L' | VENTILATION DROPPED CEILING      |
| F-F' | WINDOW JAMB      | M-M' | SIDE VENTILATION DROPPED CEILING |
| G-G' | WINDOW HEAD      |      |                                  |

The updated version of this present installation detail can be found on the PARKLEX PRODEMA web. Panel sizes and maximum distances in technical catalogue.


| PA | RKLEX PRODEMA          |
|----|------------------------|
|    | www.parklexprodema.com |

|    | PRODUCT     | SYSTEM  | DRAWN BY          | DATE    |
|----|-------------|---|-------------------|---------|
| A. | NATURCLAD   | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022 |
| _  | PLAN#       | TITLE   | APPROVED BY       | PAGE    |
|    | NC2-01-G.P. | GENERAL PERSPECTIVE   | Maialen Irastorza | 1 / 18  |

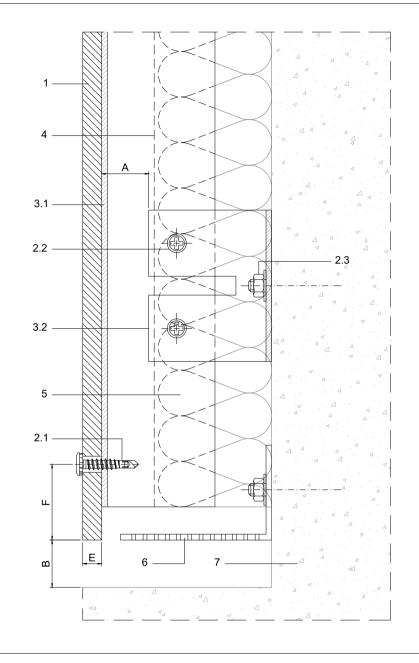


| 1 | NATURCLAD                     |                                |
|---|-------------------------------|--------------------------------|
| 2 | Screw                         | s                              |
|   | 2.1                           | Panel fastener metal           |
|   | 2.2                           | Channel fastener - by others   |
|   | 2.3                           | Wall fixing screw - by others  |
| 3 | Profile                       | s                              |
|   | 3.1                           | Aluminium L profile (40x60)    |
|   | 3.2                           | Wall bracket                   |
|   | 3.3                           | Aluminium T profile            |
|   | 3.4                           | Jamb profile - by others       |
|   | 3.5                           | Sill profile - by others       |
|   | 3.6                           | Coronation profile - by others |
| 4 | Water                         | resistant barrier - by others  |
| 5 | Therm                         | al insulation - by others      |
| 6 | Vent.                         | screen - by others             |
| 7 | Primary structure - by others |                                |

|                             | A Required min. air chamber ≥ 20mm |   |  |
|-----------------------------|------------------------------------|---|--|
| B Circulation of air ≥ 20mm |                                    |   |  |
| D Expansion joint 6-10mm    |                                    |   |  |
| E Panel thickness ≥ 8mm     |                                    |   |  |
|                             |                                    | Distance from the screws to the panel edges 20-40mm |  |




|   | PRODUCT   | SYSTEM  | DRAWN BY          | DATE    |
|---|-----------|---|-------------------|---------|
| A | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022 |
|   | PLAN#     | TITLE   | APPROVED BY       | PAGE    |
|   | NC2-01-A  | DETAIL A-A' // FAÇADE BASE                                    | Maialen Irastorza | 2 / 18  |
|   |           |   |                   |         |

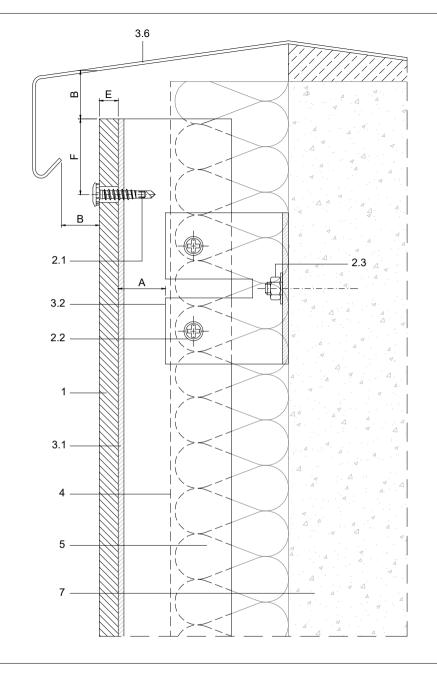


| NATURCLAD |  |
|-----------|--|
| Screws    |  |
| 2.1       | Panel fastener metal   |
| 2.2       | Channel fastener - by others   |
| 2.3       | Wall fixing screw - by others  |
| Profile   | s  |
| 3.1       | Aluminium L profile (40x60)  |
| 3.2       | Wall bracket   |
| 3.3       | Aluminium T profile  |
| 3.4       | Jamb profile - by others   |
| 3.5       | Sill profile - by others   |
| 3.6       | Coronation profile - by others   |
| Water     | resistant barrier - by others  |
| Therm     | al insulation - by others  |
| Vent. s   | screen - by others   |
| Primar    | ry structure - by others   |
|           | 2.1<br>2.2<br>2.3<br>Profile<br>3.1<br>3.2<br>3.3<br>3.4<br>3.5<br>3.6<br>Water<br>Therm |

|                             | Α | A Required min. air chamber ≥ 20mm                  |  |
|-----------------------------|---|---|--|
| B Circulation of air ≥ 20mm |   | Circulation of air ≥ 20mm                           |  |
|                             | D | Expansion joint 6-10mm                              |  |
|                             | Е | Panel thickness ≥ 8mm                               |  |
|                             |   | Distance from the screws to the panel edges 20-40mm |  |




| PARKLE   | K PRODEMA      |
|----------|----------------|
| www.park | lexprodema.com |

|   | PRODUCT   | SYSTEM  | DRAWN BY          | DATE    |
|---|-----------|---|-------------------|---------|
| A | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022 |
|   | PLAN#     | TITLE   | APPROVED BY       | PAGE    |
|   | NC2-01-B  | DETAIL B-B' // PARAPET CAP                                    | Maialen Irastorza | 3 / 18  |

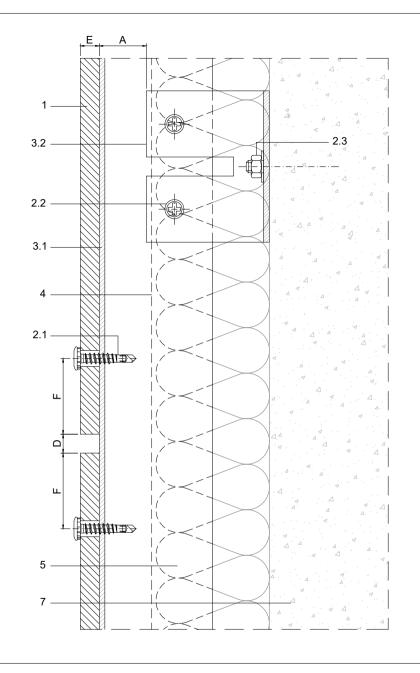


| 1 | NATURCLAD |                                |
|---|-----------|--------------------------------|
| 2 | Screw     | s                              |
|   | 2.1       | Panel fastener metal           |
|   | 2.2       | Channel fastener - by others   |
|   | 2.3       | Wall fixing screw - by others  |
| 3 | Profile   | s                              |
|   | 3.1       | Aluminium L profile (40x60)    |
|   | 3.2       | Wall bracket                   |
|   | 3.3       | Aluminium T profile            |
|   | 3.4       | Jamb profile - by others       |
|   | 3.5       | Sill profile - by others       |
|   | 3.6       | Coronation profile - by others |
| 4 | Water     | resistant barrier - by others  |
| 5 | Therm     | al insulation - by others      |
| 6 | Vent.     | screen - by others             |
| 7 | Prima     | ry structure - by others       |

| Α | Required min. air chamber ≥ 20mm                    |
|---|---|
| В | Circulation of air ≥ 20mm                           |
| D | Expansion joint 6-10mm                              |
| Е | Panel thickness ≥ 8mm                               |
|   | Distance from the screws to the panel edges 20-40mm |




| PRODEMA      |
|--------------|
| rprodema.com |
|              |

|   | PRODUCT   | SYSTEM  | DRAWN BY          | DATE    |
|---|-----------|---|-------------------|---------|
| A | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022 |
|   | PLAN#     | TITLE   | APPROVED BY       | PAGE    |
|   | NC2-01-C  | DETAIL C-C' // HORIZONTAL JOINT                               | Maialen Irastorza | 4 / 18  |
|   |           |   |                   |         |

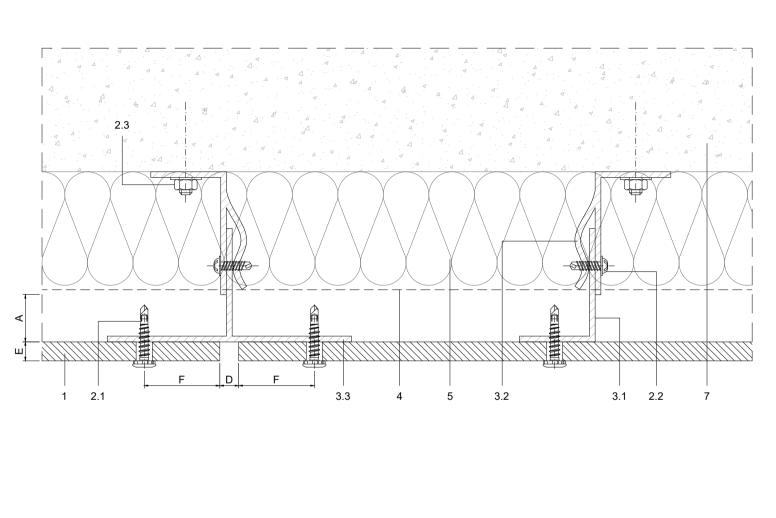


| 1 | NATU    | IRCLAD                         |
|---|---------|--------------------------------|
| 2 | Screw   | s                              |
|   | 2.1     | Panel fastener metal           |
|   | 2.2     | Channel fastener - by others   |
|   | 2.3     | Wall fixing screw - by others  |
| 3 | Profile | S                              |
|   | 3.1     | Aluminium L profile (40x60)    |
|   | 3.2     | Wall bracket                   |
|   | 3.3     | Aluminium T profile            |
|   | 3.4     | Jamb profile - by others       |
|   | 3.5     | Sill profile - by others       |
|   | 3.6     | Coronation profile - by others |
| 4 | Water   | resistant barrier - by others  |
| 5 | Therm   | al insulation - by others      |
| 6 | Vent.   | screen - by others             |
| 7 | Prima   | ry structure - by others       |
|   | •       |                                |

| Α | Required min. air chamber ≥ 20mm                    |
|---|---|
| В | Circulation of air ≥ 20mm                           |
| D | Expansion joint 6-10mm                              |
| Е | Panel thickness ≥ 8mm                               |
|   | Distance from the screws to the panel edges 20-40mm |




| P | ARKLEX PRODEMA         |
|---|------------------------|
|   | www.parklexprodema.com |

|    | PRODUCT   | SYSTEM  | DRAWN BY          | DATE          |
|----|-----------|---|-------------------|---------------|
| IA | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022       |
|    | PLAN#     | TITLE   | APPROVED BY       | PAGE          |
|    | NC2-01-D  | DETAIL D-D' // VERTICAL JOINT                                 | Maialen Irastorza | 5 <b>/</b> 18 |

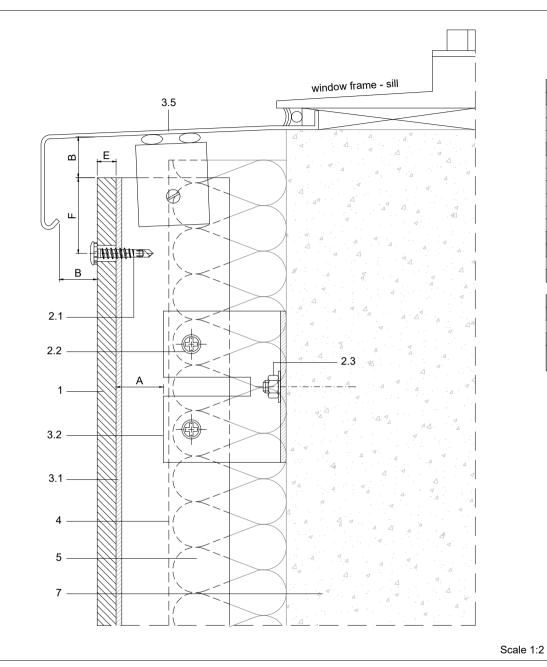


| 1 | NATU                            | NATURCLAD                      |  |  |
|---|---------------------------------|--------------------------------|--|--|
| 2 | Screw                           | s                              |  |  |
|   | 2.1                             | Panel fastener metal           |  |  |
|   | 2.2                             | Channel fastener - by others   |  |  |
|   | 2.3                             | Wall fixing screw - by others  |  |  |
| 3 | Profile                         | s                              |  |  |
|   | 3.1 Aluminium L profile (40x60) |                                |  |  |
|   | 3.2                             | Wall bracket                   |  |  |
|   | 3.3                             | Aluminium T profile            |  |  |
|   | 3.4                             | Jamb profile - by others       |  |  |
|   | 3.5                             | Sill profile - by others       |  |  |
|   | 3.6                             | Coronation profile - by others |  |  |
| 4 | Water                           | resistant barrier - by others  |  |  |
| 5 | Therm                           | al insulation - by others      |  |  |
| 6 | Vent.                           | screen - by others             |  |  |
| 7 | Primar                          | y structure - by others        |  |  |

| Α | Required min. air chamber ≥ 20mm                    |
|---|---|
| В | Circulation of air ≥ 20mm                           |
| D | Expansion joint 6-10mm                              |
| Е | Panel thickness ≥ 8mm                               |
| F | Distance from the screws to the panel edges 20-40mm |



PARKLEX PRODEMA www.parklexprodema.com

|   | PRODUCT   | SYSTEM  | DRAWN BY          | DATE    |
|---|-----------|---|-------------------|---------|
| A | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022 |
|   | PLAN#     | TITLE   | APPROVED BY       | PAGE    |
|   | NC2-01-E  | DETAIL E-E' // WINDOW SILL                                    | Maialen Irastorza | 6 / 18  |

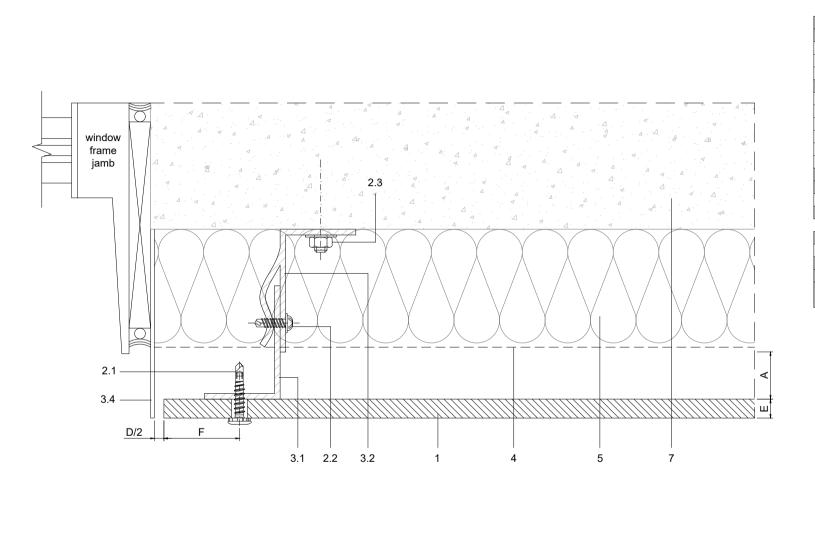

|   |            | IDOLAR                         |
|---|------------|--------------------------------|
| 1 | NATU       | JRCLAD                         |
| 2 | Screw      | s                              |
|   | 2.1        | Panel fastener metal           |
|   | 2.2        | Channel fastener - by others   |
|   | 2.3        | Wall fixing screw - by others  |
| 3 | 3 Profiles |                                |
|   | 3.1        | Aluminium L profile (40x60)    |
|   | 3.2        | Wall bracket                   |
|   | 3.3        | Aluminium T profile            |
|   | 3.4        | Jamb profile - by others       |
|   | 3.5        | Sill profile - by others       |
|   | 3.6        | Coronation profile - by others |
| 4 | Water      | resistant barrier - by others  |
| 5 | Therm      | nal insulation - by others     |
| 6 | Vent.      | screen - by others             |
| 7 | Prima      | ry structure - by others       |


A Required min. air chamber ≥ 20mm

B Circulation of air ≥ 20mm

D Expansion joint 6-10mm


E Panel thickness ≥ 8mm

F Distance from the screws to the panel edges 20-40mm




|--|

|     | PRODUCT   | SYSTEM  | DRAWN BY          | DATE    |
|-----|-----------|---|-------------------|---------|
| AA. | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022 |
|     | PLAN#     | TITLE   | APPROVED BY       | PAGE    |
|     | NC2-01-F  | DETAIL F-F' // WINDOW JAMB                                    | Maialen Irastorza | 7 / 18  |
|     |           |   |                   |         |

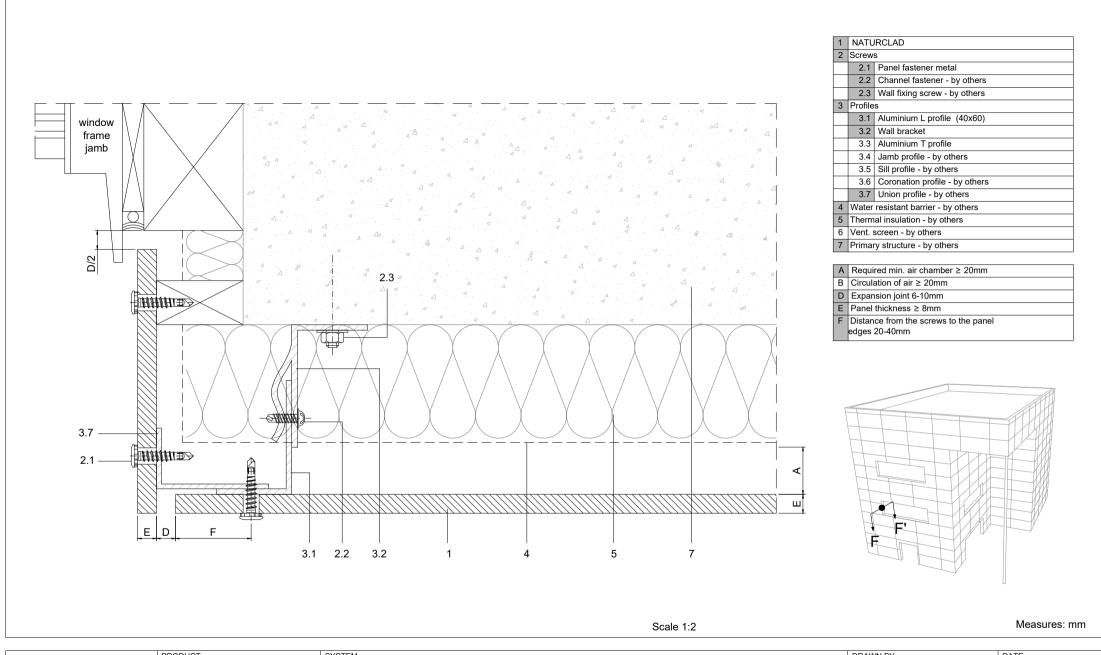


| PARKLEX PRODEMA        | NATURCLAD NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide                 | 01/2022     |
|------------------------|---------------------|---|--------------------------------|-------------|
| www.parklexprodema.com | PLAN#<br>NC2-01-F2  | DETAIL F-F' // WINDOW JAMB 2                                  | APPROVED BY  Maialen Irastorza | PAGE 8 / 18 |

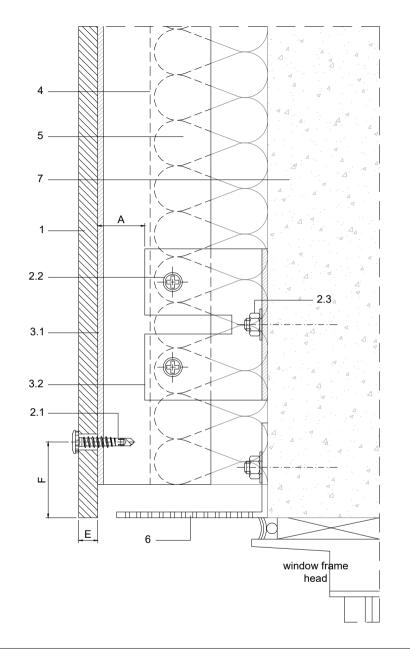


| 1 | NATU                              | RCLAD                          |  |  |
|---|-----------------------------------|--------------------------------|--|--|
| 2 | Screw                             | S                              |  |  |
|   | 2.1                               | Panel fastener metal           |  |  |
|   | 2.2                               | Channel fastener - by others   |  |  |
|   | 2.3 Wall fixing screw - by others |                                |  |  |
| 3 | Profile                           | les                            |  |  |
|   | 3.1                               | Aluminium L profile (40x60)    |  |  |
|   | 3.2                               | Wall bracket                   |  |  |
|   | 3.3                               | Aluminium T profile            |  |  |
|   | 3.4                               | Jamb profile - by others       |  |  |
|   | 3.5                               | 5 Sill profile - by others     |  |  |
|   | 3.6                               | Coronation profile - by others |  |  |
| 4 | Water                             | resistant barrier - by others  |  |  |
| 5 | Therm                             | al insulation - by others      |  |  |
| 6 | Vent.                             | screen - by others             |  |  |
| 7 | Primar                            | y structure - by others        |  |  |

| Α | Required min. air chamber ≥ 20mm                    |
|---|---|
| В | Circulation of air ≥ 20mm                           |
| D | Expansion joint 6-10mm                              |
| Е | Panel thickness ≥ 8mm                               |
|   | Distance from the screws to the panel edges 20-40mm |




PARKLEX PRODEMA www.parklexprodema.com

|   | PRODUCT   | SYSTEM  | DRAWN BY          | DATE    |
|---|-----------|---|-------------------|---------|
| A | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022 |
|   | PLAN#     | TITLE   | APPROVED BY       | PAGE    |
|   | NC2-01-G  | DETAIL G-G' // WINDOW HEAD                                    | Maialen Irastorza | 9 / 18  |

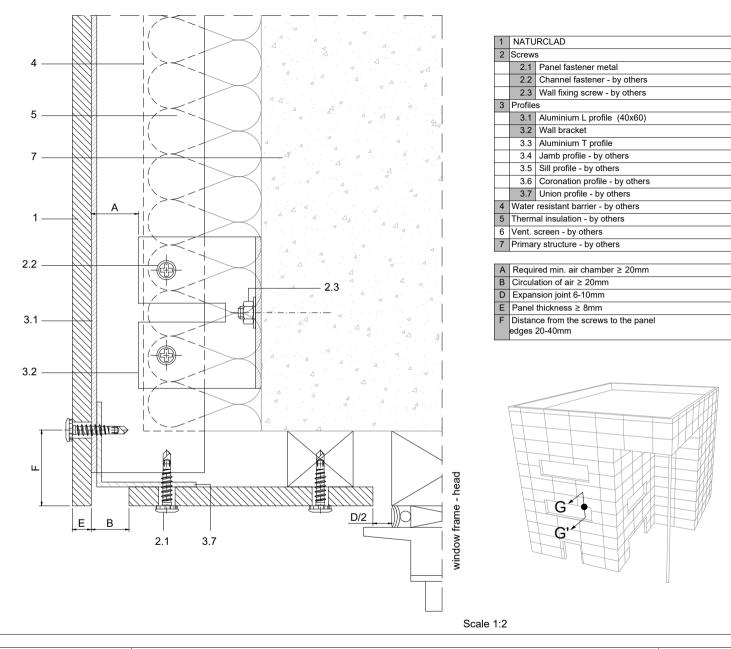

| PARKLEX PRODEMA        | PRODUCT  NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide                 | 01/2022      |
|------------------------|--------------------|---|--------------------------------|--------------|
| www.parklexprodema.com | PLAN#<br>NC2-01-G2 | DETAIL G-G' // WINDOW HEAD 2                                  | APPROVED BY  Maialen Irastorza | PAGE 10 / 18 |

Measures: mm

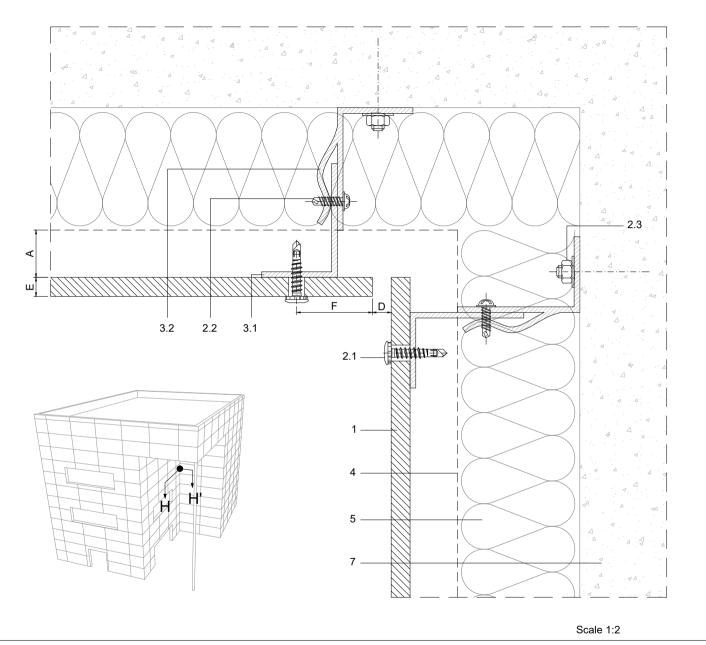

| 1 | NATL    | IRCLAD                           |  |  |  |
|---|---------|----------------------------------|--|--|--|
| 2 | Screw   | s                                |  |  |  |
| Г | 2.1     | Panel fastener metal             |  |  |  |
|   | 2.2     | 2.2 Channel fastener - by others |  |  |  |
|   | 2.3     | Wall fixing screw - by others    |  |  |  |
| 3 | Profile | es .                             |  |  |  |
|   | 3.1     | Aluminium L profile (40x60)      |  |  |  |
|   | 3.2     | Wall bracket                     |  |  |  |
|   | 3.3     | 3.3 Aluminium T profile          |  |  |  |
|   | 3.4     | 3.4 Jamb profile - by others     |  |  |  |
|   | 3.5     | Sill profile - by others         |  |  |  |
|   | 3.6     | Coronation profile - by others   |  |  |  |
| 4 | Water   | resistant barrier - by others    |  |  |  |
| 5 | Therm   | al insulation - by others        |  |  |  |
| 6 | Vent.   | screen - by others               |  |  |  |
| 7 | Prima   | ry structure - by others         |  |  |  |

A Required min. air chamber ≥ 20mm

B Circulation of air ≥ 20mm

D Expansion joint 6-10mm


E Panel thickness ≥ 8mm

F Distance from the screws to the panel edges 20-40mm

Measures: mm


| PARKLEX PRODEMA<br>www.parklexprodema.com |
|---|
|---|

|   | PRODUCT   | SYSTEM  | DRAWN BY          | DATE    |
|---|-----------|---|-------------------|---------|
| A | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022 |
|   | PLAN#     | TITLE   | APPROVED BY       | PAGE    |
|   | NC2-01-H  | DETAIL H-H' // INSIDE CORNER                                  | Maialen Irastorza | 11 / 18 |

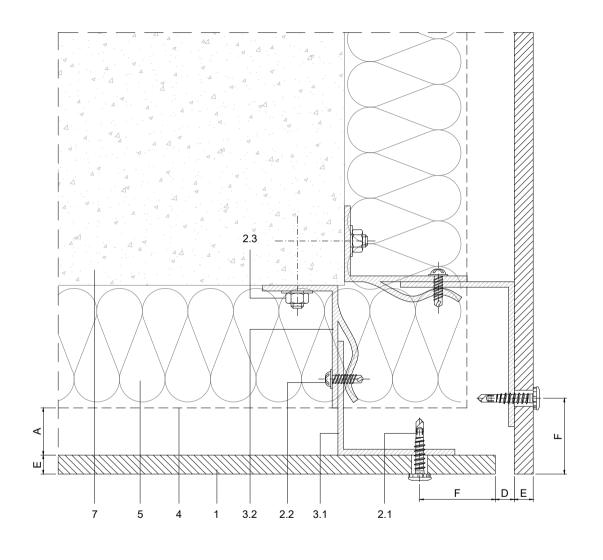


| 1 | NATU                              | IRCLAD                           |  |  |
|---|-----------------------------------|----------------------------------|--|--|
| 2 | Screw                             | s                                |  |  |
|   | 2.1                               | Panel fastener metal             |  |  |
|   | 2.2                               | 2.2 Channel fastener - by others |  |  |
|   | 2.3 Wall fixing screw - by others |                                  |  |  |
| 3 | Profile                           | s                                |  |  |
|   | 3.1                               | Aluminium L profile (40x60)      |  |  |
|   | 3.2                               | Wall bracket                     |  |  |
|   | 3.3                               | Aluminium T profile              |  |  |
|   | 3.4                               | Jamb profile - by others         |  |  |
|   | 3.5                               | Sill profile - by others         |  |  |
|   | 3.6                               | Coronation profile - by others   |  |  |
| 4 | Water                             | resistant barrier - by others    |  |  |
| 5 | Therm                             | al insulation - by others        |  |  |
| 6 | Vent.                             | screen - by others               |  |  |
| 7 | Prima                             | ry structure - by others         |  |  |

| Α | Required min. air chamber ≥ 20mm                    |
|---|---|
| В | Circulation of air ≥ 20mm                           |
| D | Expansion joint 6-10mm                              |
| Е | Panel thickness ≥ 8mm                               |
|   | Distance from the screws to the panel edges 20-40mm |




| P | ARKLEX PRODEMA         |
|---|------------------------|
|   | www.parklexprodema.com |

|    | PRODUCT   | SYSTEM  | DRAWN BY          | DATE    |
|----|-----------|---|-------------------|---------|
| IA | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022 |
|    | PLAN#     | TITLE   | APPROVED BY       | PAGE    |
|    | NC2-01-I  | DETAIL I-I' // OUTSIDE CORNER                                 | Maialen Irastorza | 12 / 18 |
|    |           |   |                   |         |

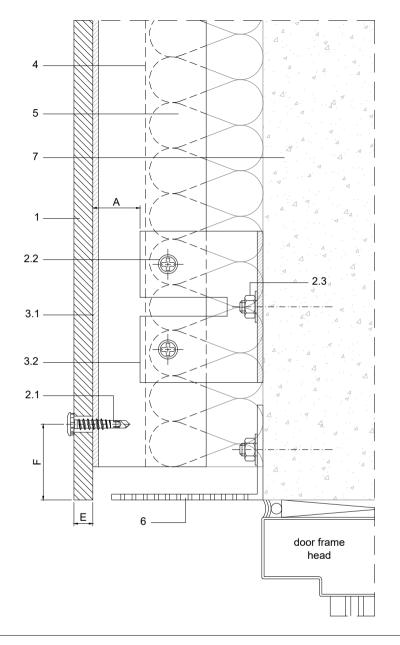


| 1        | NATURCLAD                          |                                     |  |  |  |
|----------|------------------------------------|-------------------------------------|--|--|--|
| <u> </u> |                                    |                                     |  |  |  |
| 2        | Screw                              | S                                   |  |  |  |
|          | 2.1                                | Panel fastener metal                |  |  |  |
|          | 2.2 Channel fastener - by others   |                                     |  |  |  |
|          | 2.3                                | Wall fixing screw - by others       |  |  |  |
| 3        | Profile                            | s                                   |  |  |  |
|          | 3.1                                | 3.1 Aluminium L profile (40x60)     |  |  |  |
|          | 3.2 Wall bracket                   |                                     |  |  |  |
|          | 3.3 Aluminium T profile            |                                     |  |  |  |
|          | 3.4                                | Jamb profile - by others            |  |  |  |
|          | 3.5                                | Sill profile - by others            |  |  |  |
|          | 3.6 Coronation profile - by others |                                     |  |  |  |
| 4        | Water                              | Water resistant barrier - by others |  |  |  |
| 5        | Therm                              | ermal insulation - by others        |  |  |  |
| 6        | Vent. s                            | /ent. screen - by others            |  |  |  |
| 7        | Primary structure - by others      |                                     |  |  |  |

| Α | Required min. air chamber ≥ 20mm                    |
|---|---|
| В | Circulation of air ≥ 20mm                           |
| D | Expansion joint 6-10mm                              |
| Е | Panel thickness ≥ 8mm                               |
|   | Distance from the screws to the panel edges 20-40mm |




PARKLEX PRODEMA www.parklexprodema.com

|    | PRODUCT   | SYSTEM  | DRAWN BY          | DATE    |
|----|-----------|---|-------------------|---------|
| IA | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022 |
|    | PLAN#     | TITLE   | APPROVED BY       | PAGE    |
|    | NC2-01-J  | DETAIL J-J' // DOOR HEAD                                      | Maialen Irastorza | 13 / 18 |
|    |           |   |                   |         |

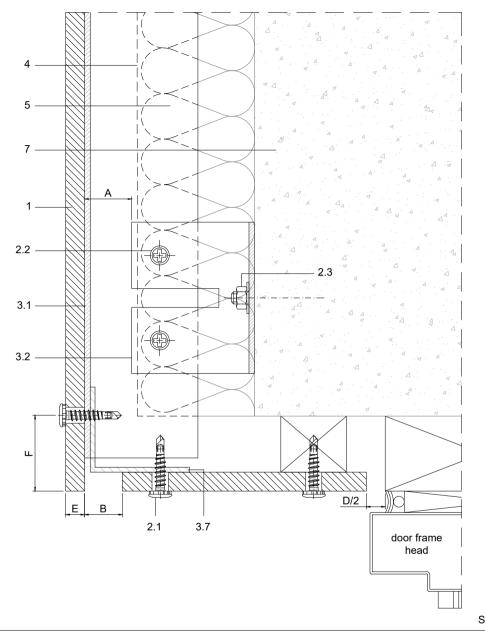


| 1 | NATURCLAD                     |                                     |  |  |  |
|---|-------------------------------|-------------------------------------|--|--|--|
| 2 | Screws                        |                                     |  |  |  |
|   | 2.1                           | Panel fastener metal                |  |  |  |
|   | 2.2                           | Channel fastener - by others        |  |  |  |
|   | 2.3                           | Wall fixing screw - by others       |  |  |  |
| 3 | Profile                       | s                                   |  |  |  |
|   | 3.1                           | 3.1 Aluminium L profile (40x60)     |  |  |  |
|   | 3.2                           | 3.2 Wall bracket                    |  |  |  |
|   | 3.3                           | 3.3 Aluminium T profile             |  |  |  |
|   | 3.4                           | 3.4 Jamb profile - by others        |  |  |  |
|   | 3.5                           | 3.5 Sill profile - by others        |  |  |  |
|   | 3.6                           | .6 Coronation profile - by others   |  |  |  |
|   | 3.7                           | 3.7 Union profile - by others       |  |  |  |
| 4 | Water                         | Vater resistant barrier - by others |  |  |  |
| 5 | Therm                         | hermal insulation - by others       |  |  |  |
| 6 | Vent. s                       | Vent. screen - by others            |  |  |  |
| 7 | Primary structure - by others |                                     |  |  |  |

| Α | Required min. air chamber ≥ 20mm                    |
|---|---|
| В | Circulation of air ≥ 20mm                           |
| D | Expansion joint 6-10mm                              |
| Е | Panel thickness ≥ 8mm                               |
|   | Distance from the screws to the panel edges 20-40mm |

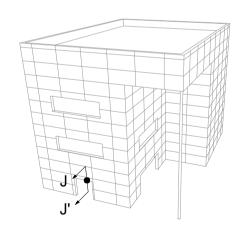


| PARKLEX PRODEMA<br>www.parklexprodema.com |
|---|
|---|


|   | PRODUCT   | SYSTEM  | DRAWN BY          | DATE    |
|---|-----------|---|-------------------|---------|
| A | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022 |
|   | PLAN#     | TITLE   | APPROVED BY       | PAGE    |
|   | NC2-01-J2 | DETAIL J-J? // DOOR HEAD 2                                    | Maialen Irastorza | 14 / 18 |

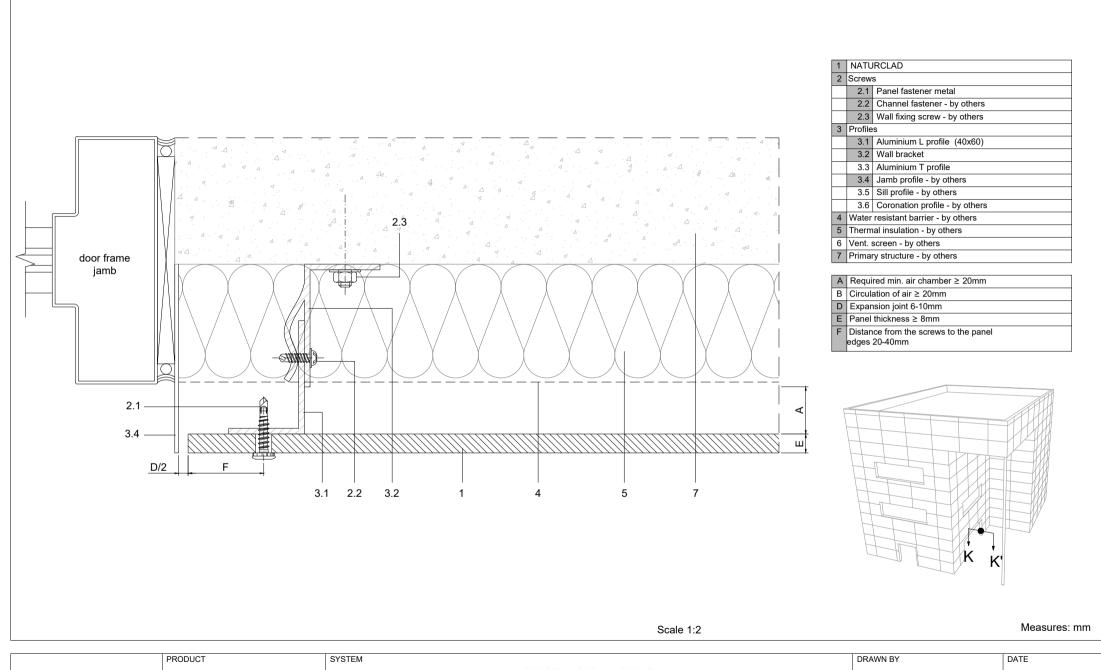

| NATURCLAD      | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide   | 01/2022   |
|----------------|---|--|---|
| PLAN# NC2-01-K | DETAIL K-K' // DOOR JAMB                                      | APPROVED BY  Maialen Irastorza   | PAGE 15 / 18  |
|                | PLAN#   | NATURCLAD  EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS  PLAN#  TITLE | NATURCLAD  EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS  PLAN#  TITLE  APPROVED BY |

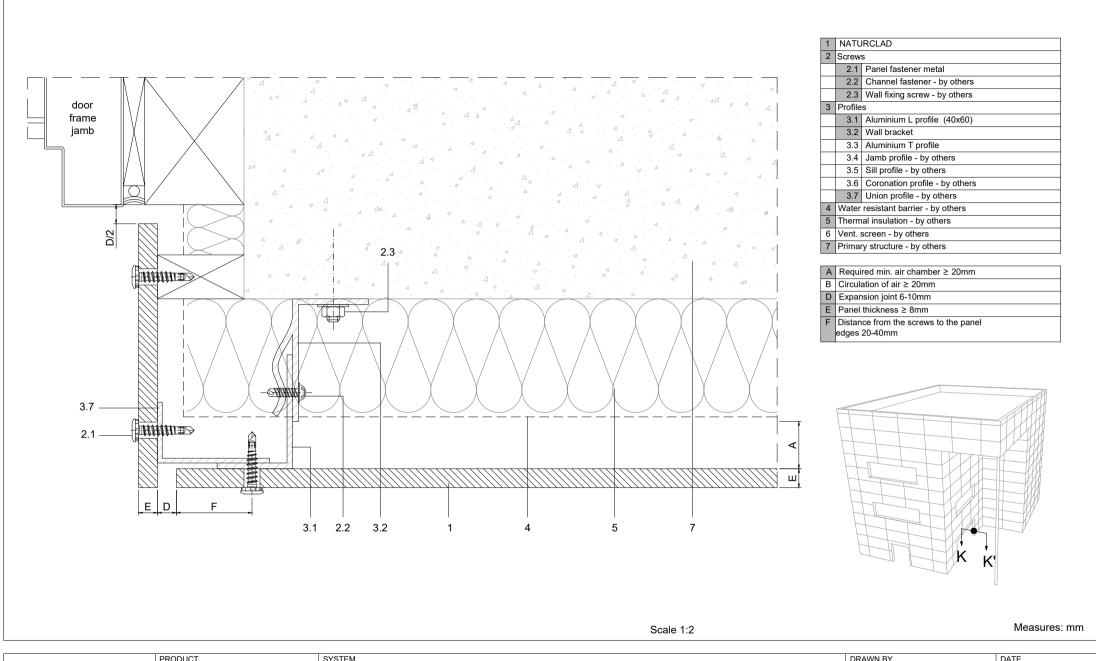


| PARKLEX PRODEMA        | PRODUCT         | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide                 | 01/2022      |  |
|------------------------|-----------------|---|--------------------------------|--------------|--|
| www.parklexprodema.com | PLAN# NC2-01-K2 | TITLE  DETAIL K-K' // DOOR JAMB 2                             | APPROVED BY  Maialen Irastorza | PAGE 16 / 18 |  |

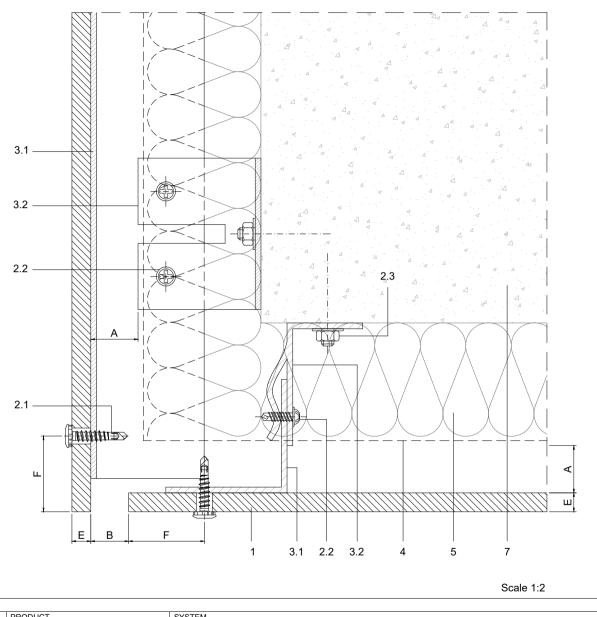


| 1 | NATURCLAD                          |                                     |  |  |
|---|------------------------------------|-------------------------------------|--|--|
| 2 | Screws                             |                                     |  |  |
|   | 2.1                                | Panel fastener metal                |  |  |
|   | 2.2                                | Channel fastener - by others        |  |  |
|   | 2.3                                | Wall fixing screw - by others       |  |  |
| 3 | Profile                            | s                                   |  |  |
|   | 3.1 Aluminium L profile (40x60)    |                                     |  |  |
|   | 3.2 Wall bracket                   |                                     |  |  |
|   | 3.3 Aluminium T profile            |                                     |  |  |
|   | 3.4 Jamb profile - by others       |                                     |  |  |
|   | 3.5                                | Sill profile - by others            |  |  |
|   | 3.6 Coronation profile - by others |                                     |  |  |
| 4 | Water                              | /ater resistant barrier - by others |  |  |
| 5 | Therm                              | ermal insulation - by others        |  |  |
| 6 | Vent.                              | Vent. screen - by others            |  |  |
| 7 | Primary structure - by others      |                                     |  |  |
|   |                                    |                                     |  |  |

| Α | Required min. air chamber ≥ 20mm      |
|---|---------------------------------------|
| В | Circulation of air ≥ 20mm             |
| D | Expansion joint 6-10mm                |
| Е | Panel thickness ≥ 8mm                 |
|   | Distance from the screws to the panel |

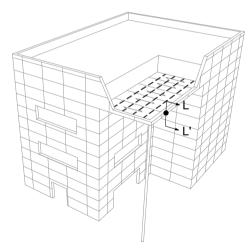


| PARKLEX PRODEMA www.parklexprodema.com |
|--|
|--|

|     | PRODUCT   | SYSTEM  | DRAWN BY          | DATE    |
|-----|-----------|---|-------------------|---------|
| A . | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022 |
|     | PLAN#     | TITLE   | APPROVED BY       | PAGE    |
|     | NC2-01-L  | DETAIL L-L' // VENTILATION DROPPED CEILING                    | Maialen Irastorza | 17 / 18 |

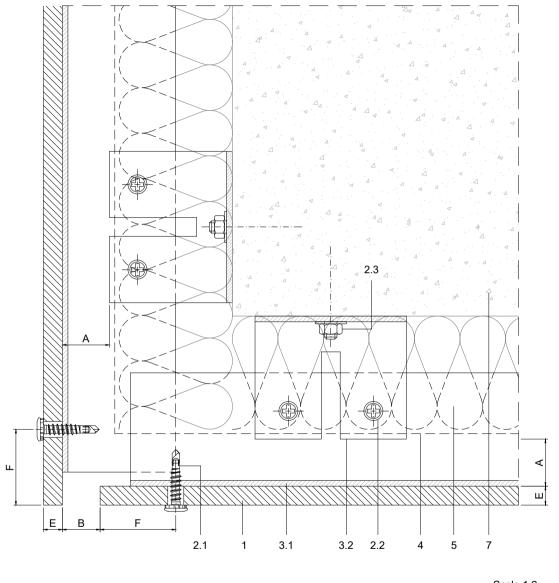

| 1 | NATURCLAD                     |                                    |  |  |
|---|-------------------------------|------------------------------------|--|--|
| 2 | Screws                        |                                    |  |  |
|   | 2.1                           | Panel fastener metal               |  |  |
|   | 2.2                           | Channel fastener - by others       |  |  |
|   | 2.3                           | Wall fixing screw - by others      |  |  |
| 3 | Profiles                      |                                    |  |  |
|   | 3.1                           | Aluminium L profile (40x60)        |  |  |
|   | 3.2                           | Wall bracket                       |  |  |
|   | 3.3                           | Aluminium T profile                |  |  |
|   | 3.4                           | Jamb profile - by others           |  |  |
|   | 3.5                           | Sill profile - by others           |  |  |
|   | 3.6                           | Coronation profile - by others     |  |  |
| 4 | Water                         | ater resistant barrier - by others |  |  |
| 5 | Therm                         | hermal insulation - by others      |  |  |
| 6 | Vent. screen - by others      |                                    |  |  |
| 7 | Primary structure - by others |                                    |  |  |

| Α | Required min. air chamber ≥ 20mm                    |  |  |  |
|---|---|--|--|--|
| В | Circulation of air ≥ 20mm                           |  |  |  |
| D | Expansion joint 6-10mm                              |  |  |  |
| Е | Panel thickness ≥ 8mm                               |  |  |  |
|   | Distance from the screws to the panel edges 20-40mm |  |  |  |

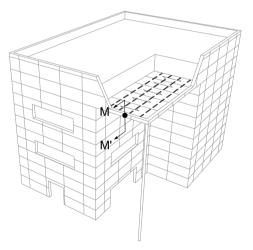

| PARKLEX PRODEMA www.parklexprodema.com |
|--|
|--|

| Р | RODUCT    | SYSTEM  | DRAWN BY          | DATE           |
|---|-----------|---|-------------------|----------------|
| A | NATURCLAD | EXPOSED SCREW FIXING WITH METALLIC PROFILES AND WALL BRACKETS | Joseba Salbide    | 01/2022        |
| P | LAN#      | TITLE   | APPROVED BY       | PAGE           |
|   | NC2-01-M  | DETAIL M-M' // SIDE VENTILATION DROPPED CEILING               | Maialen Irastorza | 18 <b>/</b> 18 |